

TECHNICAL DATA SHEET

150093

ATTAX

ATTAX CLIP BUTTERFLY®

Elastic attachment to fix two parts together.

MAIN FEATURES

Technical data

Blind assembly in the window

Function guaranteed up to 6 disassembly

Load installation on clip support **less than 150N** to a thickness of 1.5 to 2 mm

Average load assembly in ABS (polypropylene) window **30N -5/+10**

Average load disassembly in ABS (polypropylene) window **75N ±15**

CHARACTERISTICS

Material







Treatment

Clip

Quenched and tempered steel

Grey Delta Protekt KL100

DIMENSIONS

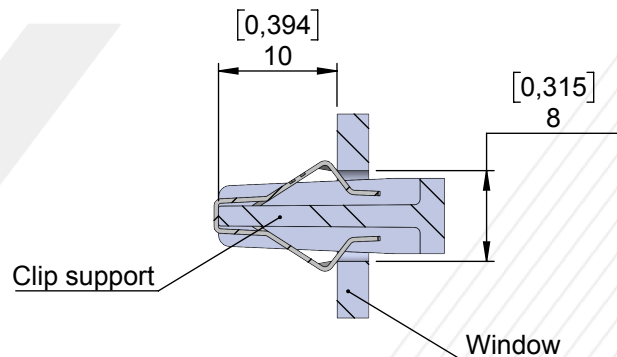

Keeping on clip support by scratching on a surface.